

## Solutions for the Metalforming Industry

### Minster E2-600-120-54 "Heavi-Stamper" High Production Press

New 1996  
Stock #100108P

#### Press Specifications:

Tonnage, heavy duty rating: .....600 Tons @.375" in.  
Dia. of Ecc. Shaft at mains & Eccentric: .....11.00 – 23.75 in.  
Stroke of Slide: .....14.00 in.  
Adjustment of Slide: .....10.00 in.  
Shutheight, SDAU: .....36.00 in., on Bolster  
Shutheight, SDAU: .....43.00 in., on Bed  
Bolster Plate Thickness: .....7.00 in.  
Area of Slide, R-L x F-B: .....120.00 x 54.00 in.  
Area of Bed, R-L x F-B: .....120.00 x 54.00 in.  
Area of Bolster, R-L x F-B: .....120.00 x 54.00 in.  
Opening in Bed, R-L x F-B, w/1-2.5" rib: .....100.0 x 26.00 in.  
Distance between Gib Surfaces .....R-L: 122.00 in..  
Distance Floor to top of Bed: .....44.00 in.  
Upright Opening, F-B: .....48.00 in  
Speed: .....0-50 SPM  
Drive Motor Power, RPM: .....100HP/1800 RPM\*  
Approximate Press Weight: .....215,000 pounds

#### Equipped With:

Single geared  
Minster combination air operated multi disc clutch and brake  
Air operated flywheel brake  
Minster Monitorflow Lube System  
Hydraulic Tie Rod Nuts  
Motorized shutheight adjustment with digital reading  
One set of four (4) Air-Loc elastomer style press mounts  
Minster Centralized Motor and Clutch Control Panel

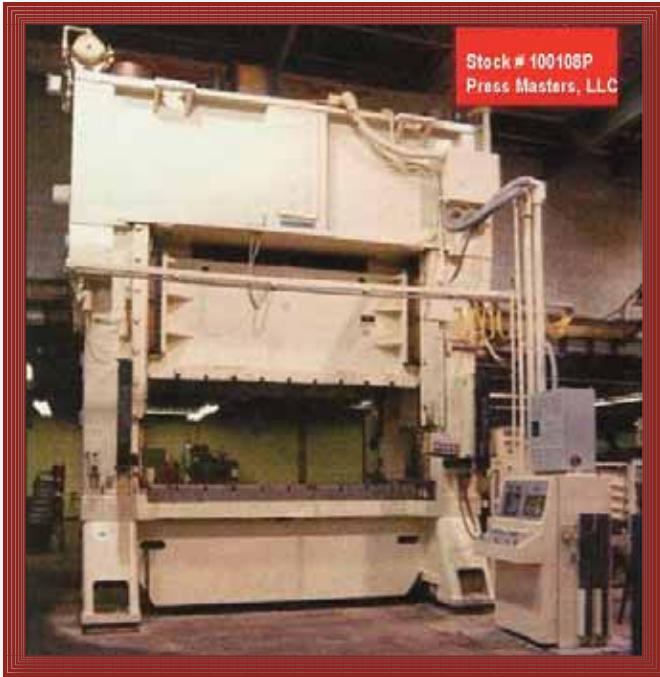


Photo of actual press

#### **Corporate Office**

55 Realty Drive, Suite 100 • Cheshire, CT 06410  
(203) 271-0644 • (203) 439-9116 Fax  
[www.pressmasters.com](http://www.pressmasters.com)

## Solutions for the Metalforming Industry

### Equipped With. (cont'd)

- OmniLink 5000 Clutch Control
  - Eight Channel PLS
  - Programmable to 105 setups
  - Stroke Position/Speed Indicator
  - Stroke, Batch, Parts, & Quality Counters
  - Automatic Top stop
  - Brake Monito
  - Die Protection Module
  - Four Channel Tonnage Monitor

Link Black Max Die Space Guard Front and Rear



Photo of similar operator interface terminal



Price, as is where is: .....Contact Press Masters